




HY-115 / JETPRO 9.3 (HY-230)

HYTORC standard electric power packs. Reliable, efficient and economical, the HY-115 will outperform any standard pump on the market. The Hydraulic Power System operates at a very quiet ~80 dB. All pumps come equipped with an Oil Cooler, making overheating a thing of the past. Simple controls make for short set-up times and the upgradeable semi-automatic feature allows the operator to experience faster and easier tightening.

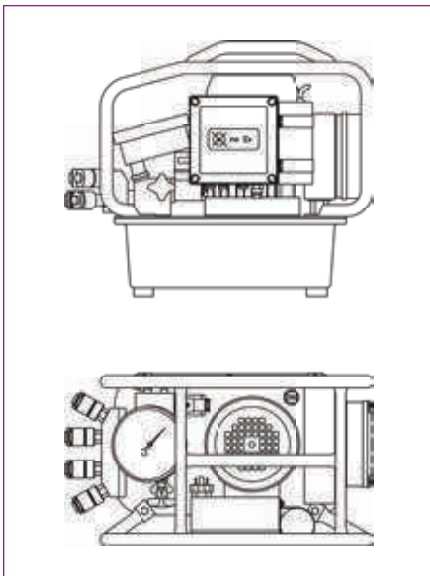

PUMP SPECIFICATIONS AND FEATURES

Power	115v (17 Amp) / 230v (9 Amp) / 400v (6 Amp) 115V: 1Ph 90-125 / 60Hz 230V: 1Ph 200-230V / 50+60Hz 400V: 3Ph 400-460
Gauge	0-10 k PSI (+/-1% Accuracy)
Reservoir Capacity	1.35 gals. / 5.1 l (2 gals. / 7.6 l tank optional for the HY-115)
Stages	3
Weight	57 lbs. / 25.8 kg
Maximum Oil Flow Rate	620 cu. in./min. / 10 l/min.
Oil Cooler	Yes
Protective Caging	Yes
15' Remote Control	Yes



HYTORC MISSION STATEMENT

HYTORC'S MISSION IS TO OPTIMIZE SAFETY, QUALITY AND SCHEDULE IN INDUSTRIAL BOLTING THROUGH INNOVATIVE SOLUTIONS, AND AN UNYIELDING COMMITMENT TO WORLD-CLASS CUSTOMER SERVICE.

MOBILE SERVICES



Mobile service, maintenance, and on-site training to get you and your tools back on the job faster than ever before.

WORLDWIDE SERVICE



The HYTORC Universe is made up of over 1,000 trained bolting specialists to support your bolting needs in over 100 countries.

THE HYTORC STANDARD



With over 50 years of experience focused entirely on developing the highest quality industrial bolting systems, HYTORC remains committed to higher performance and service and offers superior technology, quality, and support.

The World's Most Trusted Industrial Bolting Systems

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2022 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



Headquarters:
Via Avigliana, 126/R 10040
Almese (TO)

Phone:
011 / 935 29 34

Email:
info@hytorc-italy.com

Online:
hytorc-italy.com